



# 5-15P 45 Degree to 5-15R Triple Tap Power Cable

PW-110FTB-xx - Specifications

## Description

This power cord consists of a 45 degree 5-15P male on one end and a power tap that consists of three 5-15R female on the other end. It is typically used as a power extension cord. These cables are constructed with UL mandated inner plastic frame molds to enhance terminal alignment and produce a high quality connector. The connectors premium quality ensures a snug fit with receptacles. Each assembly is 100% continuity tested and 100% HVT (High Voltage) tested and inspected before shipping.

## Physical Characteristics

Colors Available	Black / White
Lengths Available	6ft / 10ft / 15ft
Wire Gauge	16 AWG
Jacket	Heavy Duty SJT
Jacket Material	100% Virgin PVC - Polyvinyl Chloride
Jacket Fire Rating	VW-1, FT2
Strain Relief	Molded 100% Virgin PVC
Temperature Rating	-20 deg C to 105 deg C

## Connector(s)

Connector A	1 - NEMA 5-15P (45 Degree Angle)
Connector B	3 - NEMA 5-15R (Power Tap)

## Performance

Power Rating	13 Amp / 125 Volt
--------------	-------------------


## Approvals / Environmental

5-15P	c(UL)us
5-15R	c(UL)us
Cable	c(UL)us, CSA
ISO	ISO 9001:2000, ISO 14000
RoHS	Yes
Reach	Yes
Conflict Minerals	Yes

## Warranty Information

Warranty	Limited Lifetime
----------	------------------



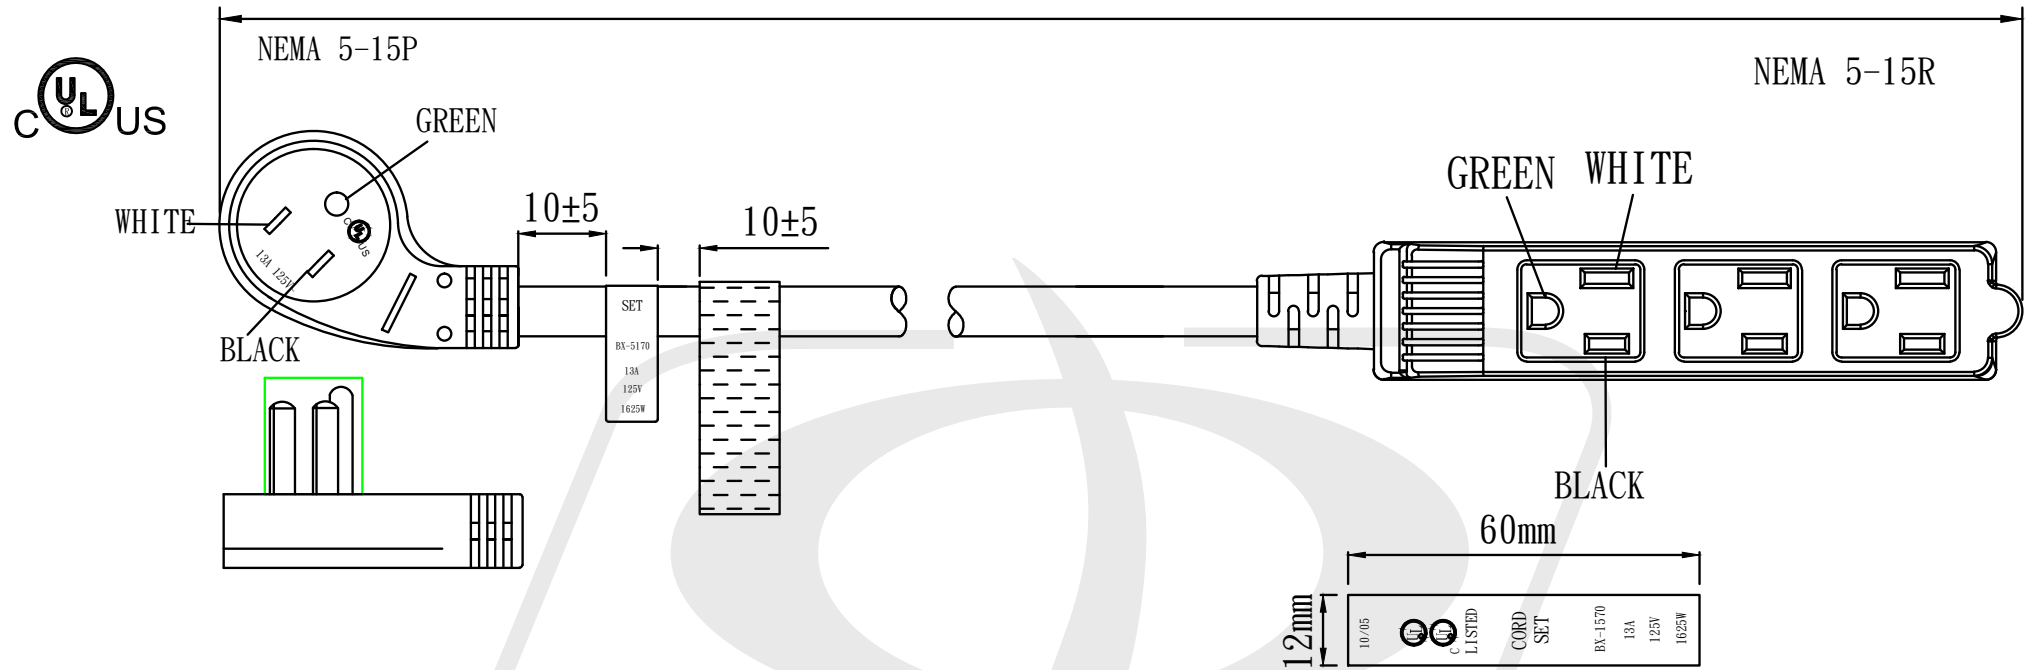

Tolerance

>0±0.30

>1.0±0.50

>10.0±1.0



>20.0±2.0

Angle: ±1°



# 5-15P 45 Degree to 5-15R Triple Tap Power Cable

PW-110FTB-xx - Packaging Information

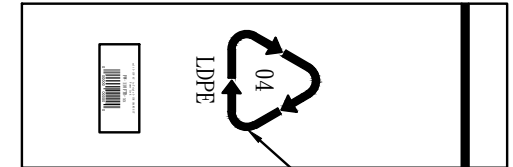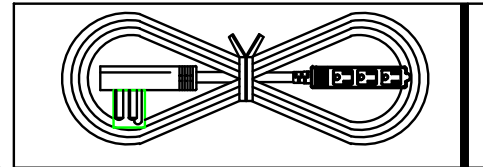

THE INDIVIDUALLY BAGGED CORDS WILL BE PLACED IN BAGS OF 10 PIECES

P/N	LENGTH(Lmm)	UPC
PW-110FTB-06	1830mm	675678002092
PW-110FTB-06WH	1830mm	675678002122
PW-110FTB-10	3048mm	675678002108
PW-110FTB-10WH	3048mm	675678002139
PW-110FTB-15	4572mm	675678002115
PW-110FTB-15WH	4572mm	675678002146

